



**FITTING INSTRUCTIONS FOR AB0004BK ADVENTURE BARS**  
**TRIUMPH TIGER 800 2011-**



1.PICTURE ONE



2.PICTURE TWO

**THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.**  
**DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.**

**Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike**

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY)



**LEFT HAND SIDE**



**THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW.**  
**DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.**



**RIGHT HAND SIDE**

**LEGEND**


- ITEM 1 = ADVENTURE BAR LEFT-HAND SIDE (CB013) (x1).  
ITEM 2 = M8 WASHERS, THREE PER SIDE (x6).  
ITEM 3 = M8x1.25x20mm LONG HEX HEAD BOLTS, THREE PER SIDE (x6).  
ITEM 4 = RIBBED FINISHING INSERT, ONE PER SIDE (BPCS 283295) (x2).  
ITEM 5 = ADVENTURE BAR RIGHT-HAND SIDE (CB014) (x1).

**TOOLS REQUIRED**

- Socket set to include a 13mm socket and wrench.
  - Torque wrench (up to 20Nm).



3. PICTURE THREE

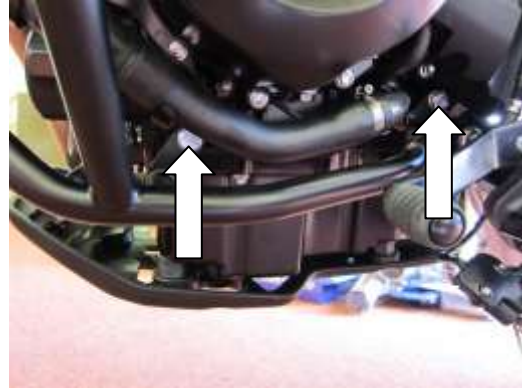


4. PICTURE FOUR

#### **Left-hand side (as you sit on bike)**

- Remove the three plastic push covers in positions arrowed in pictures TWO and THREE.
- Offer the left-hand side adventure bar into position and using the three M8 washers and three M8 bolts secure into position as shown in picture ONE. **Do not exceed 20Nm torque.**



5. PICTURE FIVE

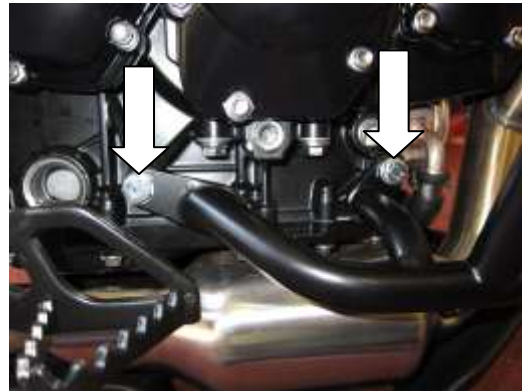

6. PICTURE SIX

#### **Right-hand side (as you sit on bike)**

- Remove the three plastic push covers in positions arrowed in pictures FIVE and SIX.
- Offer the right-hand side adventure bar into position and using the three M8 washers and three M8 bolts secure into position as shown in picture TWO. **Do not exceed 20Nm torque.**



ISSUE 1 06/09/2011 (NSY)

#### **CONSUMER NOTICE**

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

#### **R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



**France**  
**INSTRUCTIONS DE MONTAGE DES PROTECTIONS**  
**AB0004BK TRIUMPH TIGER 800 2011-**

**LA PRESENTATION DES PIECES R&G DANS L'EMBALLAGE N'EST PAS TOUJOURS IDENTIQUE AU SENS DE MONTAGE.**

**Merci de noter que dans le cas où les protections sont assemblées avec une bague en caoutchouc, merci de bien vouloir le retirer lors du montage des pièces sur la moto. Ne pas commencer le montage des pièces s'il manque une ou plusieurs pièces.**

**LEGENDE**

- ART 1 = Protection gauche (CB013) (x1).
- ART 2 = Rondelles M8 (x6) 3 par côté.
- ART 3 = Vis M8x1.25x20mm (x6) 3 par côté.
- ART 4 = Bouchons (BPCS 283295) (x2).
- ART 5 = Protection droite (CB014) (x1).

**OUTILS NECESSAIRES**

- Jeu de clef à douille 13 mm.
- Clef dynamométrique (sup à 20Nm).

**COTE GAUCHE**

- Enlever les trois couvercles en plastique montrés dans les images 3 et 4
- Placer la protection gauche en position sur la moto et utiliser les 3 rondelles M8 et les 3 vis M8 fournies dans le kit. Serrer au couple de 20 Nm.

**COTE DROIT**

- Enlever les trois couvercles en plastique montrés dans les images 5 et 6
- Placer la protection droite en position sur la moto et utiliser les 3 rondelles M8 et les 3 vis M8 fournies dans le kit. Serrer au couple de 20 Nm.