



**FITTING INSTRUCTIONS FOR CP0078 & CP0079 CRASH PROTECTORS
HONDA VFR400 (NC30) & RVF400RR (NC35)**



Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt – *the rubber washers should be thrown away!*

Fitting Instructions.

Refer to diagram.

Tools required:

14mm and 17mm sockets and driver.

Philips and flat blade screwdrivers.

2x Small spare bolts, or nails, screws ,etc.

- Ensure engine is cold. (Several hours required)
- Remove mid (or upper on two piece race fairings) and lower fairings – lower may be removed in one piece.
- Loosen front mounting bolts (A) *On NC35 remove lower bolts (B) and spacers.*
- Fit brackets against lower engine lug (B) and slide brackets upper mounting tabs under cast boss on head into which upper bolts fit. The brackets may well require tapping into position, as they are deliberately a tight fit!
- Once fitted, fit supplied bolts into unused lower lugs and leave slightly loose. *On NC35, use the original bolts. The brackets replace both left and right hand spacers- use additional supplied spacer on left hand side.*
- Fit stainless cross bar between brackets and use small bolts, screws or nails to slide into hole (C) to hold bar in place.
- Fully tighten bolts at (A) and (B) on both sides. Cross bar may still be slightly loose.
- Refit lower fairing.
- Take the 110mm bolt and washer and fit through one cup and the 30mm stainless spacer. Offer up and replace small bolt with assembly into left hand end of crossbar through bracket. Use the remaining 90mm bolt, washer and cup and fit to right hand side.
- Tighten all bolts fully, and then screw outer nylon crash protectors onto cups. Tighten bolt until you feel some compression from inside the protector. Turn a little more so that you feel the compression increase slightly. Then apply a quarter turn. Do not overtighten as damage can occur to the bike. Do not exceed 40nm of torque
- Refit mid (or complete upper) fairings.

R&G Racing

Unit 5K, Blacknest Industrial Park, Blacknest Road, Alton, Hampshire, GU34 4PX

Tel: +44 (0)870 220 6380 Fax: +44 (0)1420 521101 www.rg-racing.com Email: info@rg-racing.com



CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect.


Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

NC30 / NC35

View from left side

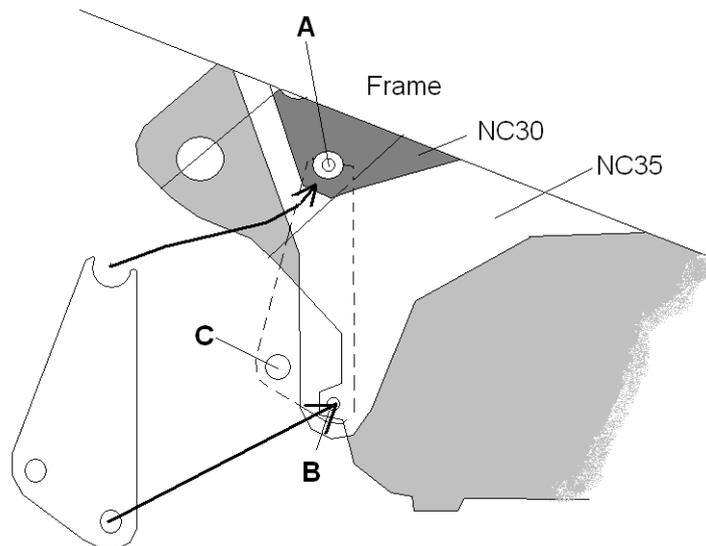

R&G Racing

Unit 5K, Blacknest Industrial Park, Blacknest Road, Alton, Hampshire, GU34 4PX

Tel: +44 (0)870 220 6380 Fax: +44 (0)1420 521101 www.rg-racing.com Email: info@rg-racing.com

